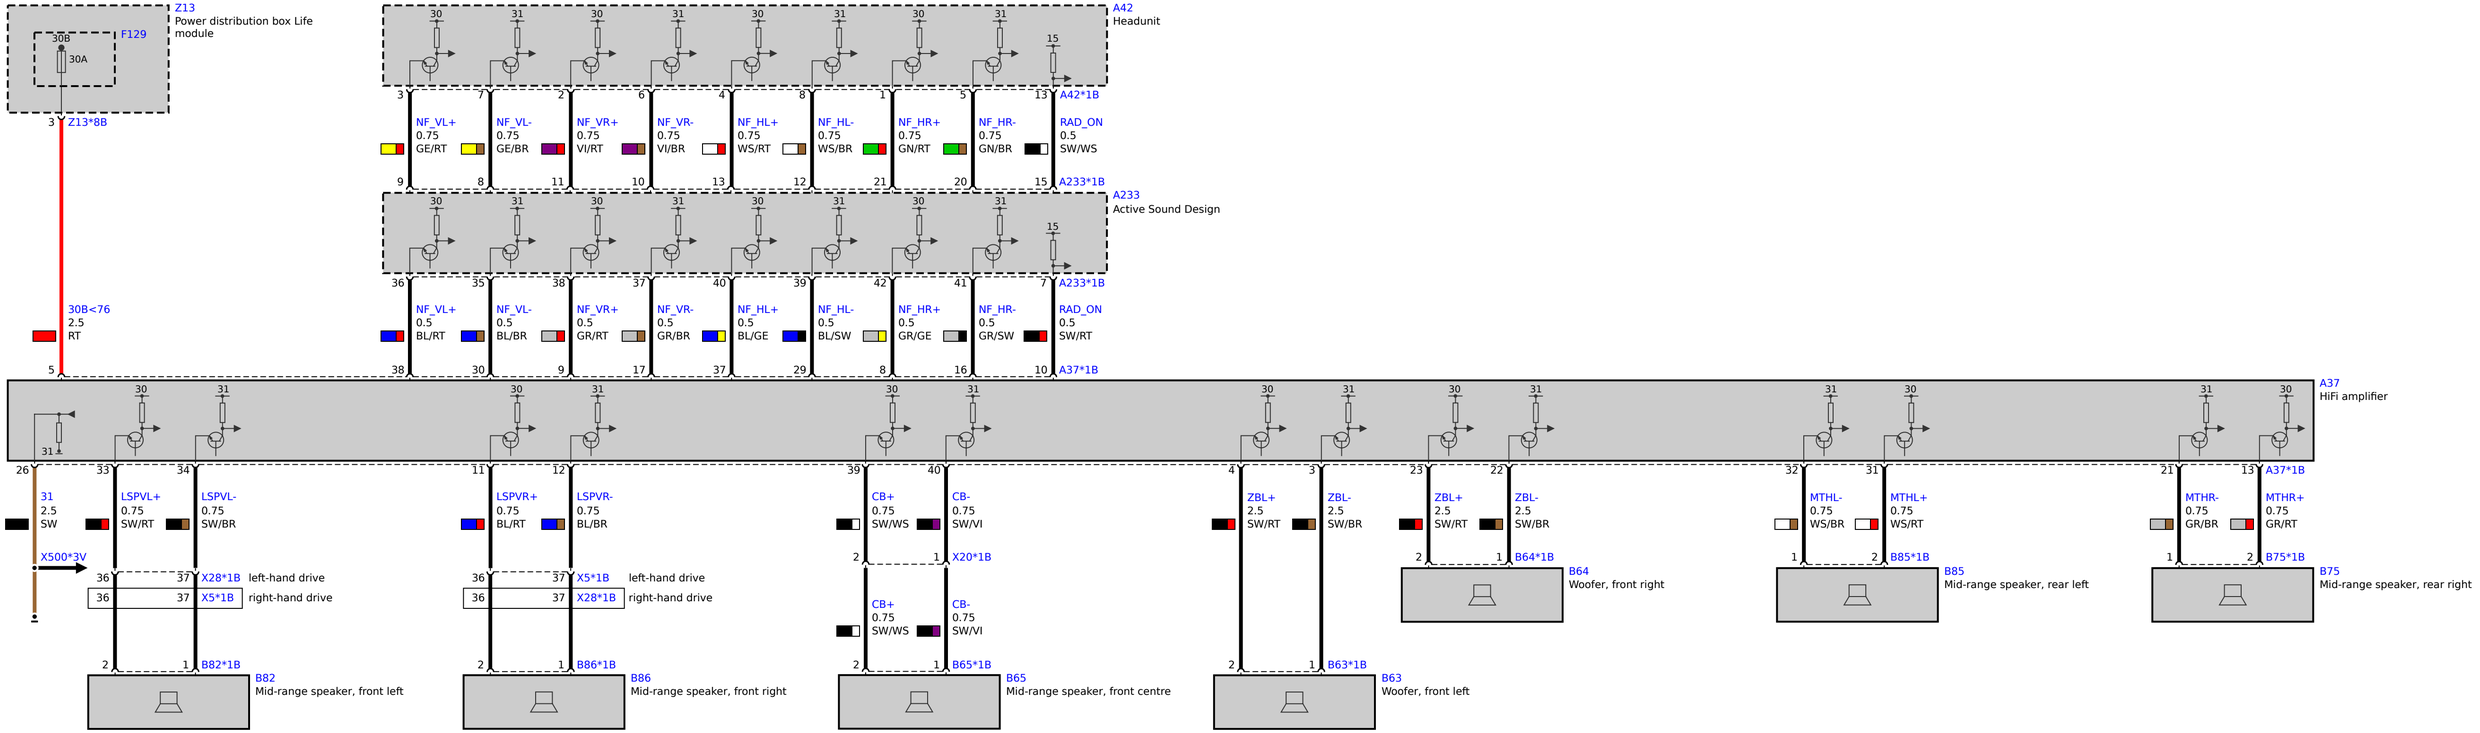
Z13
Power distribution box Life module
F129
30B
30A
Z13*8B
30B<76
2.5
RT
A42
Headunit
A42*1B
NF_VL+ 0.75 GE/RT
NF_VL- 0.75 GE/BR
NF_VR+ 0.75 VI/RT
NF_VR- 0.75 VI/BR
NF_HL+ 0.75 WS/RT
NF_HL- 0.75 WS/BR
NF_HR+ 0.75 GN/RT
NF_HR- 0.75 GN/BR
RAD_ON 0.5 SW/WS
A233*1B
A233
Active Sound Design
A233*1B
NF_VL+ 0.5 BL/RT
NF_VL- 0.5 BL/BR
NF_VR+ 0.5 GR/RT
NF_VR- 0.5 GR/BR
NF_HL+ 0.5 BL/GE
NF_HL- 0.5 BL/SW
NF_HR+ 0.5 GR/GE
NF_HR- 0.5 GR/SW
RAD_ON 0.5 SW/RT
A37*1B
A37
HiFi amplifier
31 2.5 SW
X500*3V
LSPVL+ 0.75 SW/RT
LSPVL- 0.75 SW/BR
X28*1B left-hand drive
X5*1B right-hand drive
B82*1B
B82
Mid-range speaker, front left
LSPVR+ 0.75 BL/RT
LSPVR- 0.75 BL/BR
X5*1B left-hand drive
X28*1B right-hand drive
B86*1B
B86
Mid-range speaker, front right
CB+ 0.75 SW/WS
CB- 0.75 SW/VI
X20*1B
CB+ 0.75 SW/WS
CB- 0.75 SW/VI
B65*1B
B65
Mid-range speaker, front centre
ZBL+ 2.5 SW/RT
ZBL- 2.5 SW/BR
B63*1B
B63
Woofer, front left
ZBL+ 2.5 SW/RT
ZBL- 2.5 SW/BR
B64*1B
B64
Woofer, front right
MTHL- 0.75 WS/BR
MTHL+ 0.75 WS/RT
B85*1B
B85
Mid-range speaker, rear left
MTHR- 0.75 GR/BR
MTHR+ 0.75 GR/RT
B75*1B
B75
Mid-range speaker, rear right