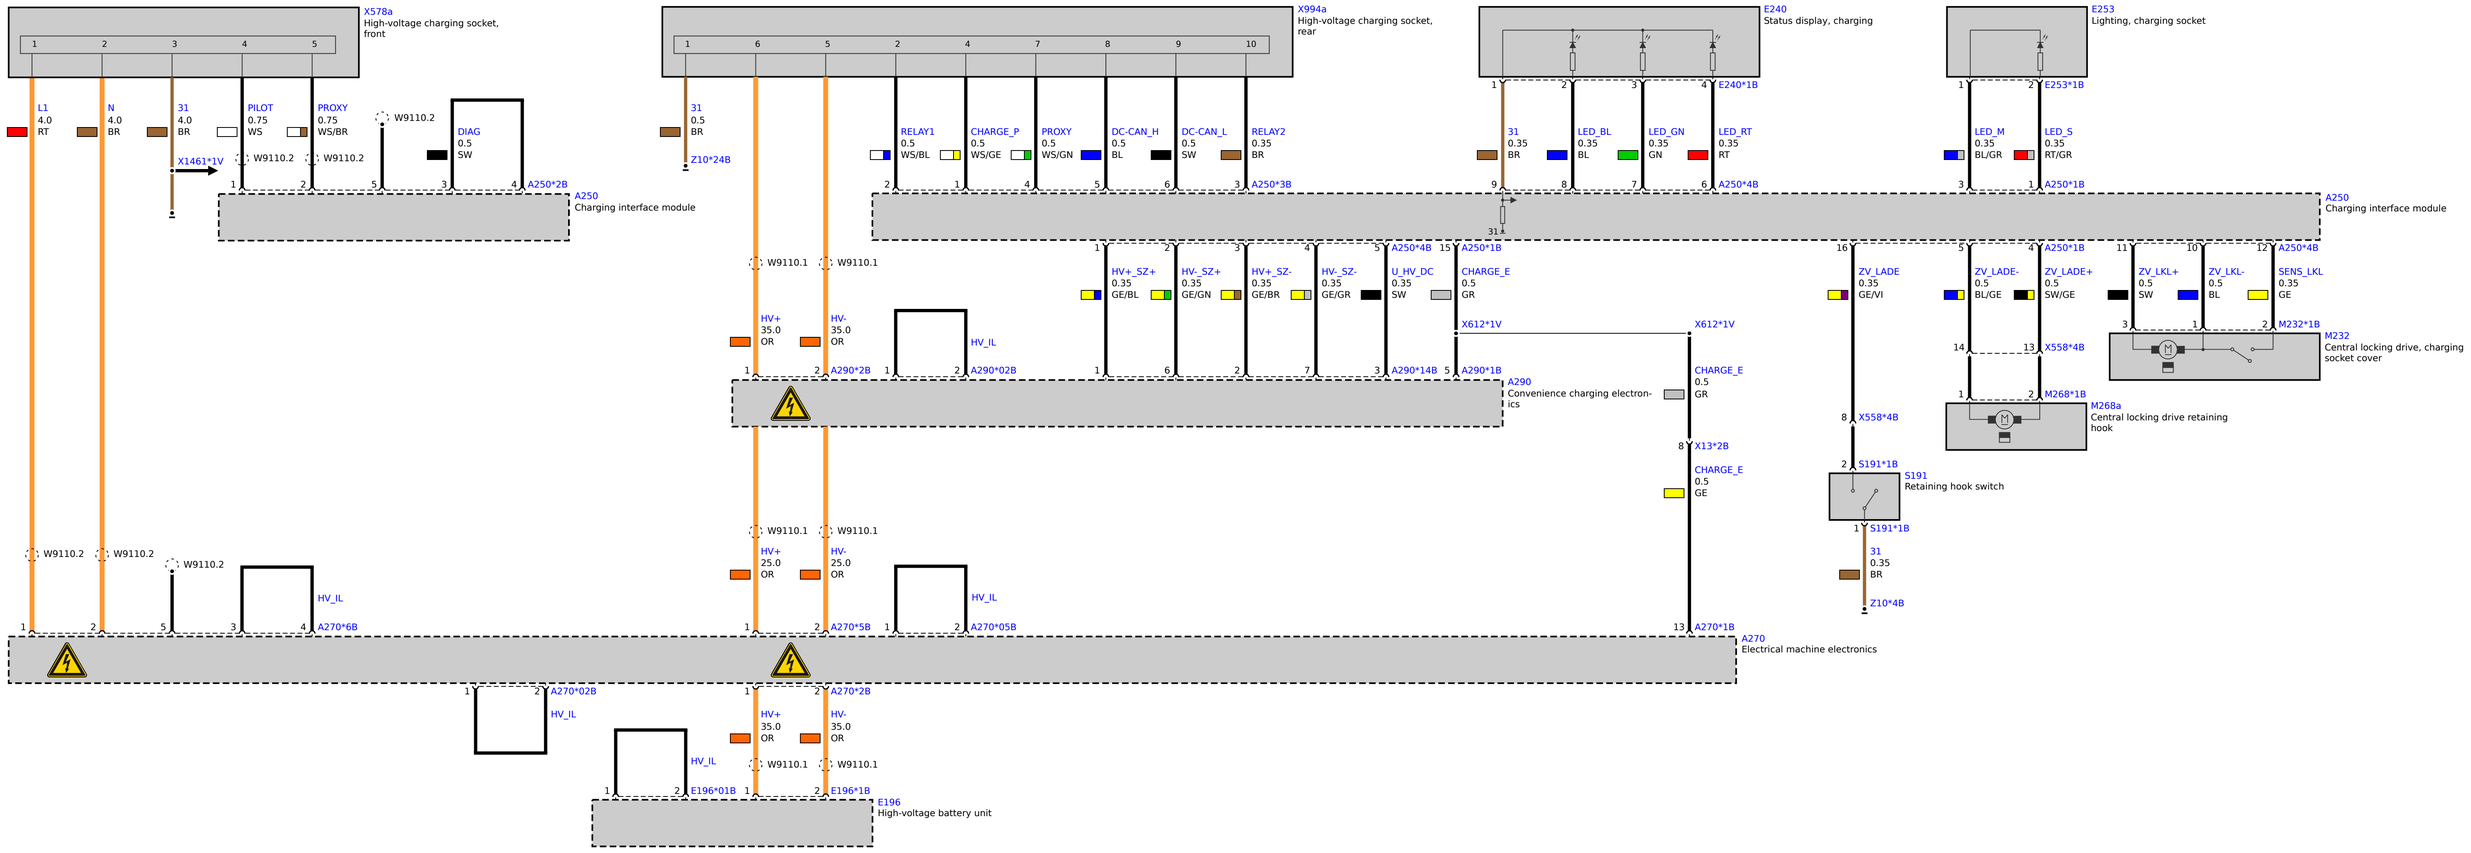
X578a
High-voltage charging socket, front
L1 4.0 RT
N 4.0 BR
31 4.0 BR
PILOT 0.75 WS
PROXY 0.75 WS/BR
W9110.2
DIAG 0.5 SW
X1461*1V
A250*2B
A250
Charging interface module
X994a
High-voltage charging socket, rear
31 0.5 BR
Z10*24B
RELAY1 0.5 WS/BL
CHARGE_P 0.5 WS/GE
PROXY 0.5 WS/GN
DC-CAN_H 0.5 BL
DC-CAN_L 0.5 SW
RELAY2 0.35 BR
A250*3B
E240
Status display, charging
E240*1B
31 0.35 BR
LED_BL 0.35 BL
LED_GN 0.35 GN
LED_RT 0.35 RT
A250*4B
E253
Lighting, charging socket
E253*1B
LED_M 0.35 BL/GR
LED_S 0.35 RT/GR
A250*1B
W9110.1
HV+ 35.0 OR
HV- 35.0 OR
HV_IL
A290*2B
A290*02B
HV+_SZ+ 0.35 GE/BL
HV-_SZ+ 0.35 GE/GN
HV+_SZ- 0.35 GE/BR
HV-_SZ- 0.35 GE/GR
U_HV_DC 0.35 SW
CHARGE_E 0.5 GR
A250*4B
A250*1B
X612*1V
A290*14B
A290*1B
A290
Convenience charging electronics
CHARGE_E 0.5 GR
X13*2B
CHARGE_E 0.5 GE
ZV_LADE 0.35 GE/VI
X558*4B
S191*1B
S191
Retaining hook switch
Z10*4B
ZV_LADE- 0.5 BL/GE
ZV_LADE+ 0.5 SW/GE
X558*4B
M268*1B
M268a
Central locking drive retaining hook
ZV_LKL+ 0.5 SW
ZV_LKL- 0.5 BL
SENS_LKL 0.35 GE
M232*1B
M232
Central locking drive, charging socket cover
HV+ 25.0 OR
HV- 25.0 OR
A270*6B
A270*5B
A270*05B
A270*1B
A270
Electrical machine electronics
A270*02B
A270*2B
E196*01B
E196*1B
E196
High-voltage battery unit