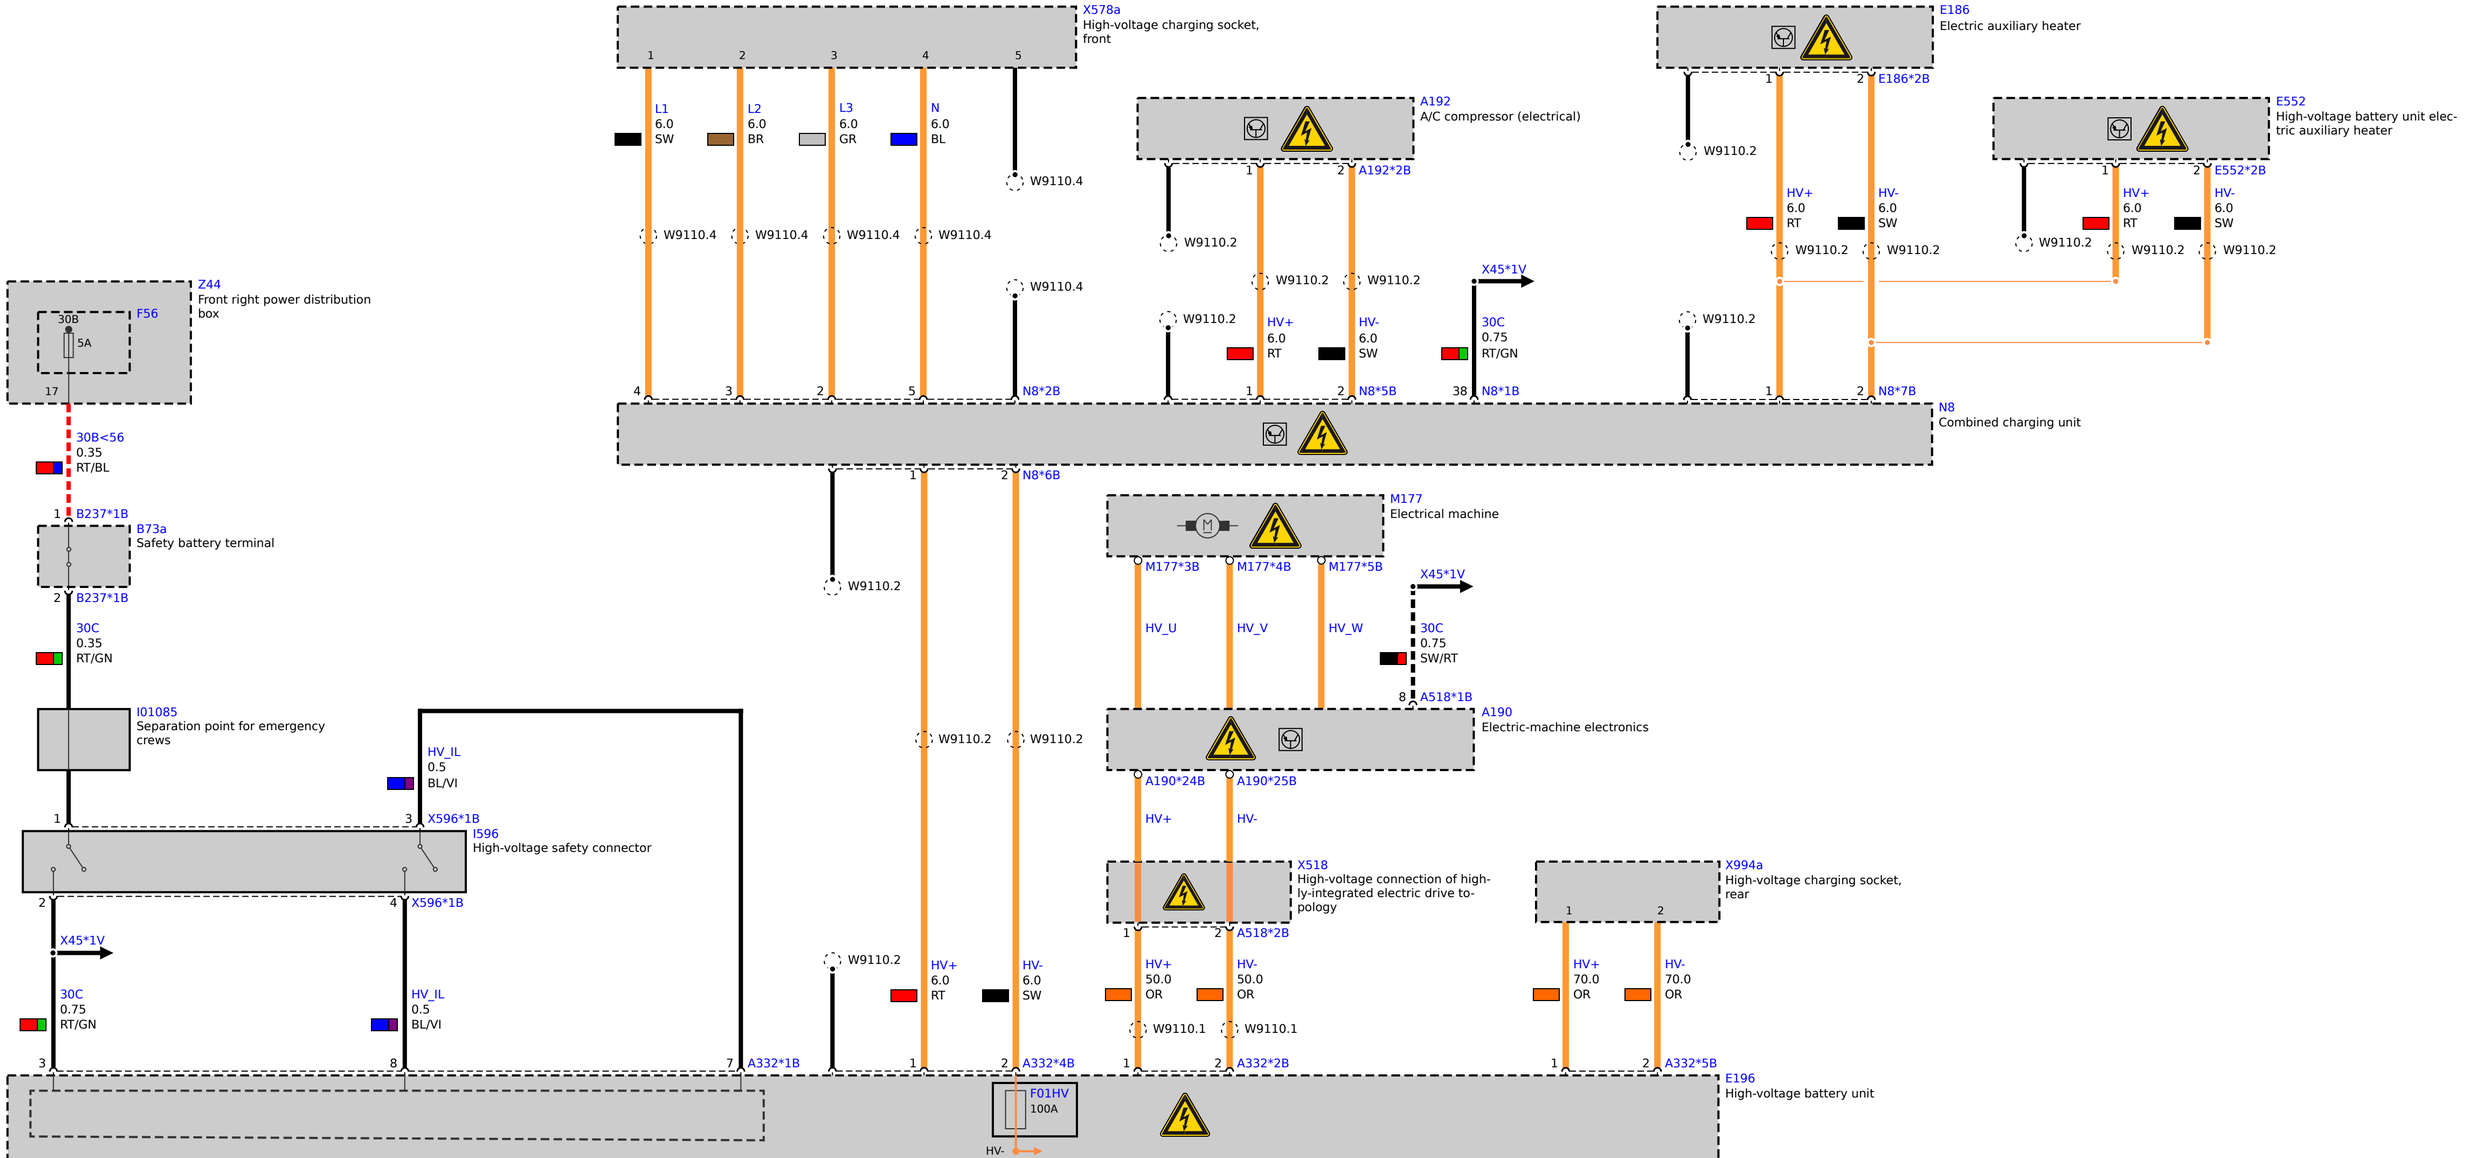
X578a
High-voltage charging socket, front
L1 6.0 SW
L2 6.0 BR
L3 6.0 GR
N 6.0 BL
W9110.4
A192
A/C compressor (electrical)
A192*2B
W9110.2
HV+ 6.0 RT
HV- 6.0 SW
X45*1V
30C 0.75 RT/GN
N8*2B
N8*5B
N8*1B
E186
Electric auxiliary heater
E186*2B
N8*7B
E552
High-voltage battery unit electric auxiliary heater
E552*2B
N8
Combined charging unit
N8*6B
Z44
Front right power distribution box
F56
30B
5A
17
30B<56 0.35 RT/BL
B237*1B
B73a
Safety battery terminal
30C 0.35 RT/GN
I01085
Separation point for emergency crews
HV_IL 0.5 BL/VI
X596*1B
I596
High-voltage safety connector
M177
Electrical machine
M177*3B
M177*4B
M177*5B
HV_U
HV_V
HV_W
30C 0.75 SW/RT
A518*1B
A190
Electric-machine electronics
A190*24B
A190*25B
HV+
HV-
X518
High-voltage connection of highly-integrated electric drive topology
A518*2B
HV+ 50.0 OR
HV- 50.0 OR
W9110.1
X994a
High-voltage charging socket, rear
HV+ 70.0 OR
HV- 70.0 OR
A332*1B
A332*4B
A332*2B
A332*5B
E196
High-voltage battery unit
F01HV
100A
HV-