

X578
High-voltage charging socket
1) USA
2) Not USA and China
3) China

L1 4.0 RT
N 4.0 SW


X435*1V
W9110.2
W9110.2

PILOT 0.75
PROXY 0.75
WS/BR
WS

31_PA 4.0 GE/GN
Z10*26B


PILOT 0.75 GN
PROXY 0.75 WS
DIAG 0.5 GE
DIAG 0.5 BR

DIAG 0.75 GE

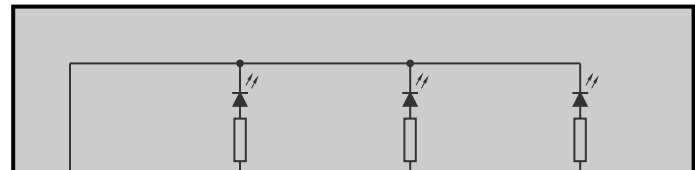


E240
Status display, charging


31 0.75 VI/BR
LED_BL 0.75 VI/RT
LED_GN 0.75 VI/GE
LED_RT 0.75 VI/GN




HV_BR




HV_BR



HV_BR



HV_IL





HV_IL






E196
High-voltage battery unit




A290
Convenience charging electronics

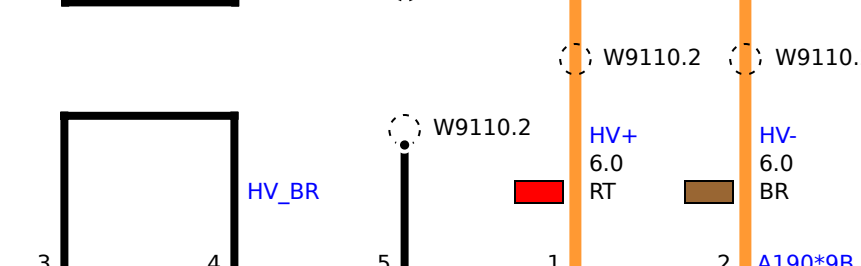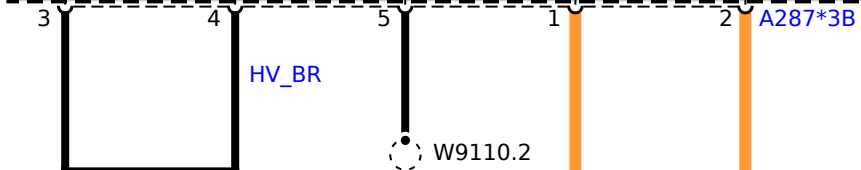


A190
Electric-machine electronics

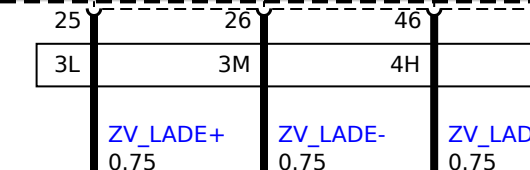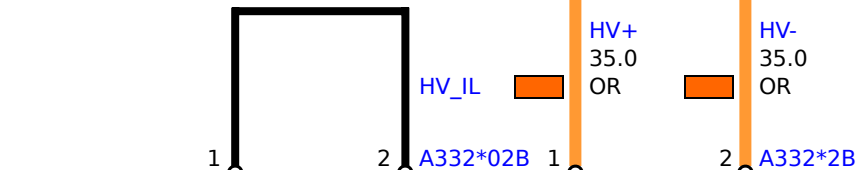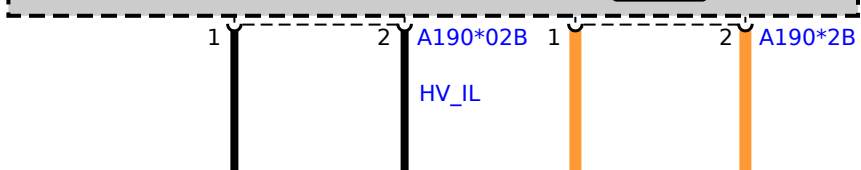


ZV_LADE+ 0.75 SW/GE
ZV_LADE- 0.75 SW/BL
ZV_LADE 0.75 BR/RT

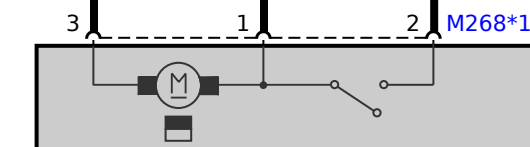

M268
Central locking drive, charging socket

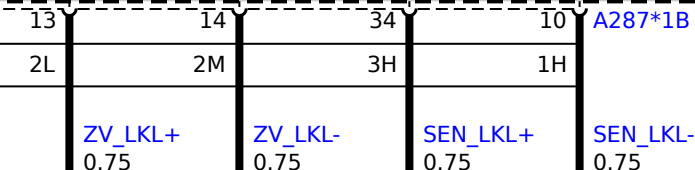

ZV_LKL+ 0.75 GR/GE
ZV_LKL- 0.75 GR/BL
SEN_LKL+ 0.75 GE/BL
SEN_LKL- 0.75 GE/RT

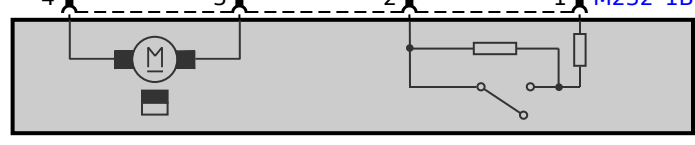

M232
Central locking drive, charging socket cover