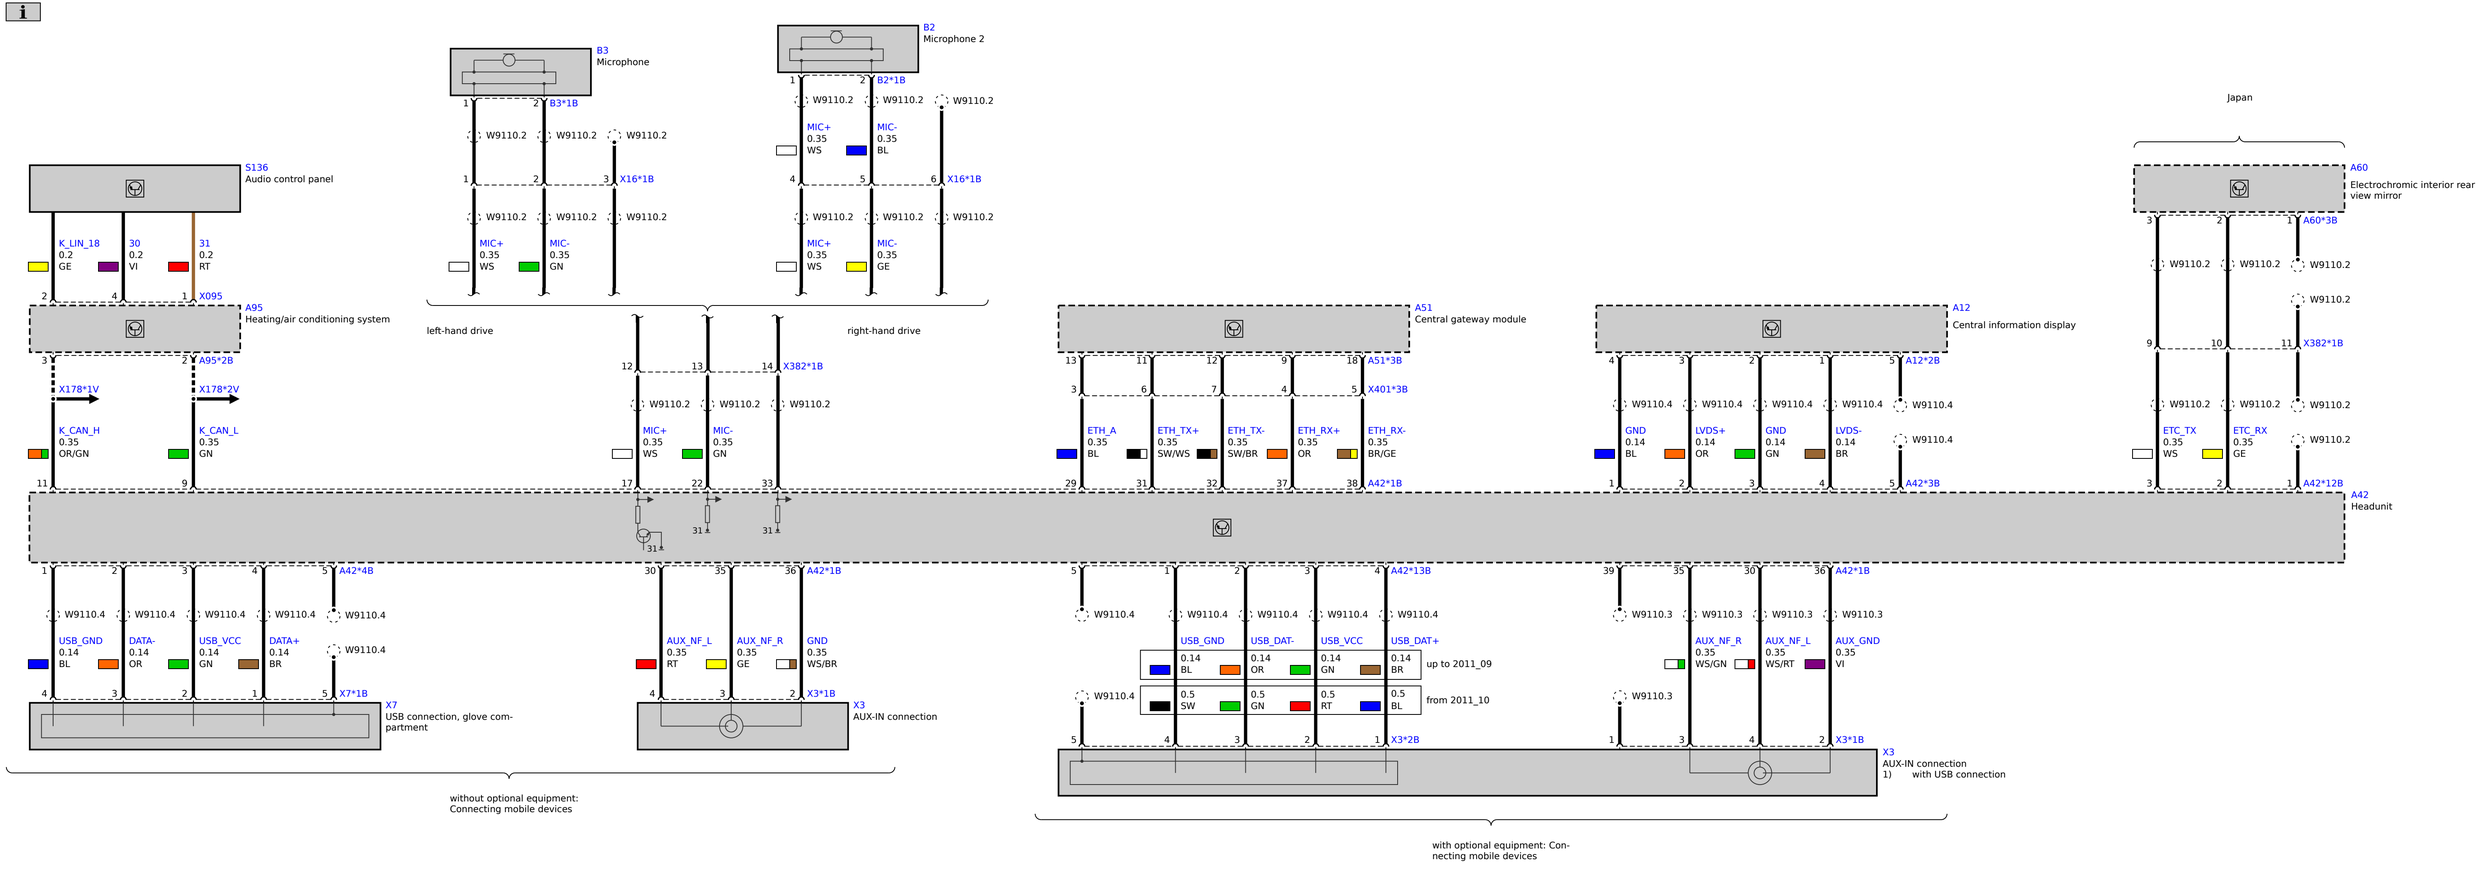
S136
Audio control panel
K_LIN_18
0.2
GE
30
0.2
VI
31
0.2
RT
X095
A95
Heating/air conditioning system
X178*1V
X178*2V
A95*2B
K_CAN_H
0.35
OR/GN
K_CAN_L
0.35
GN
B3
Microphone
B3*1B
W9110.2
X16*1B
MIC+
0.35
WS
MIC-
0.35
GN
left-hand drive
B2
Microphone 2
B2*1B
MIC+
0.35
WS
MIC-
0.35
BL
MIC-
0.35
GE
right-hand drive
X382*1B
A51
Central gateway module
A51*3B
X401*3B
ETH_A
0.35
BL
ETH_TX+
0.35
SW/WS
ETH_TX-
0.35
SW/BR
ETH_RX+
0.35
OR
ETH_RX-
0.35
BR/GE
A42*1B
A12
Central information display
A12*2B
W9110.4
GND
0.14
BL
LVDS+
0.14
OR
GND
0.14
GN
LVDS-
0.14
BR
A42*3B
Japan
A60
Electrochromic interior rear view mirror
A60*3B
X382*1B
ETC_TX
0.35
WS
ETC_RX
0.35
GE
A42*12B
A42
Headunit
A42*4B
USB_GND
0.14
BL
DATA-
0.14
OR
USB_VCC
0.14
GN
DATA+
0.14
BR
X7*1B
X7
USB connection, glove compartment
A42*1B
AUX_NF_L
0.35
RT
AUX_NF_R
0.35
GE
GND
0.35
WS/BR
X3*1B
X3
AUX-IN connection
without optional equipment:
Connecting mobile devices
A42*13B
USB_GND
USB_DAT-
USB_VCC
USB_DAT+
0.14
BL
0.14
OR
0.14
GN
0.14
BR
up to 2011_09
0.5
SW
0.5
GN
0.5
RT
0.5
BL
from 2011_10
X3*2B
W9110.3
AUX_NF_R
0.35
WS/GN
AUX_NF_L
0.35
WS/RT
AUX_GND
0.35
VI
X3*1B
X3
AUX-IN connection
1) with USB connection
with optional equipment: Connecting mobile devices